

ANCHORS *Featuring* **GONE** *Fabric Collection* AWEIGH *Q1031* **SAILING** by Stephanie Marrott



Finished Quilt Size: 55" x 71"



Fabric A
84297-432
1 Panel (24" repeat)



Fabric B
84298-423
5/8 yard



Fabric C (backing)
84299-234
3 1/2 yards



Fabric D (binding)
84301-332
5/8 yard



Fabric E
84301-442
1/3 yard



Fabric F
84302-234
1 3/4 yard



Fabric G
84303-442
1/2 yard



Fabric H
84305-442
1/4 yard



Fabric I
Q1077-89025-101
Fat 1/8



Fabric J
Q1401-14564-222
1/8 yard





Fabric K
Q1401-14564-333
1/3 yard




Anchors Aweigh

Please read all instructions carefully before starting. All instructions include a 1/4" seam allowance and strips are cut from selvage to selvage unless otherwise stated.

1. Cut the following:


- Fabric A** - cut 6 - 11 1/2" x 11 1/2" squares (center designs evenly)**
Fabric B - cut 2 - 8 1/2" x 36 1/2"
Fabric D - BINDING - cut 7 - 2 1/4" strips, sew end to end and press in half
Fabric E - cut 4 - 2" strips, subcut 6 - 2" x 9 1/2" and 6 - 2" x 12 1/2"
Fabric F - cut lengthwise: cut 4 - 8 1/2" x 54 1/2"
Fabric G - cut 3 - 2" strips; subcut 6 - 2" x 6 1/2" and 6 - 2" x 9 1/2"
 cut 5 - 1 1/2" strips. Sew three together end to end and cut 2 - 1 1/2" x 52 1/2" (SIDES). Cut 2 - 1 1/2" x 38 1/2" (TOP and BOTTOM).
Fabric H - cut 1 - 3 7/8" strip, subcut 2 - 3 7/8" squares, cut in half diagonally 
 cut 1 - 2" strip, use the remainder of the 3 7/8" strip and subcut 6 - 2" squares, 6 - 2" x 3 1/2", and 3 - 2" x 6 1/2"
Fabric I - cut 2 - 3 7/8" squares, cut in half diagonally 
Fabric J - cut 1 - 2" strip, subcut 3 - 2" x 6 1/2"
Fabric K - cut 8 - 1" strips, subcut 12 - 1" x 11 1/2" (SIDES) and 12 - 1" x 12 1/2" (TOP and BOTTOM)**

2. Sew borders (K) around each focal block (A), SIDES first then TOP and BOTTOM borders. ** (If focal block measurement are slightly different, cut K borders slightly bigger, sew around focal blocks then trim all focal blocks down to 12 1/2" x 12 1/2".)

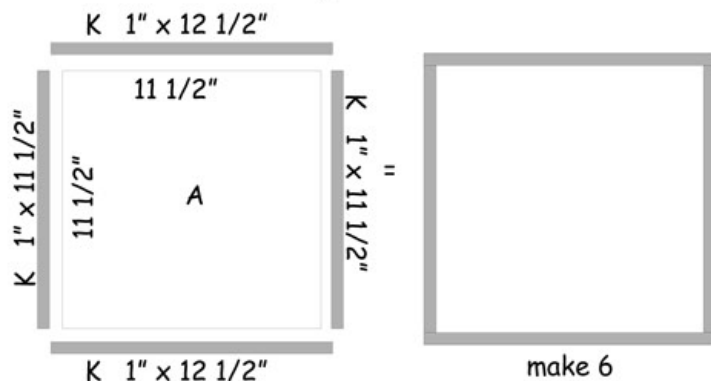


3. Sew rows of Sailboats and Focal blocks alternating with rows of Fabric B according to the diagram.

4. Borders: Sew inner border (G) to the quilt, SIDES first, then TOP and BOTTOM borders. Next, sew outer border (F) to the quilt, SIDES first, then TOP and BOTTOM borders.

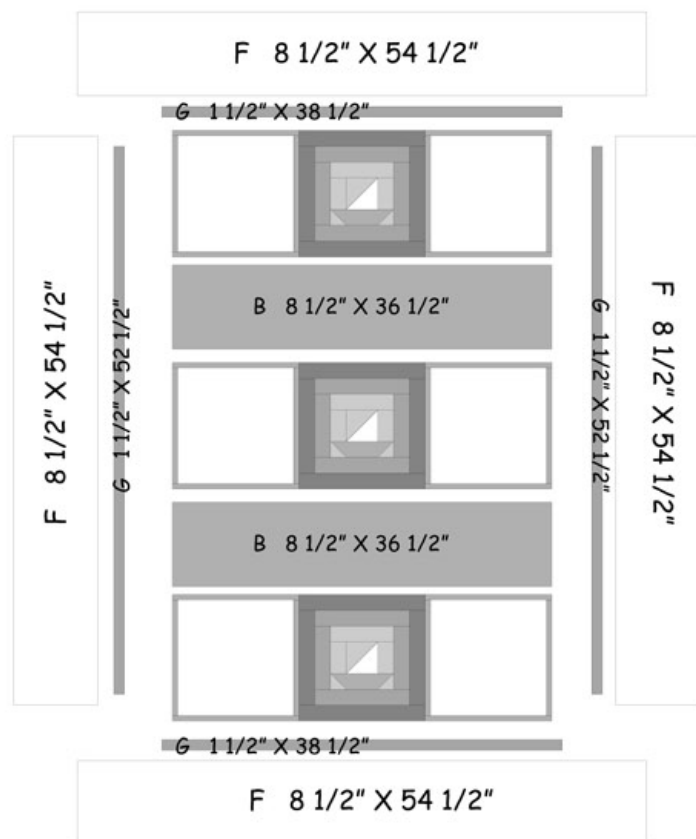

2. Piecing Order:

1. Make 3 - 12" finished (12 1/2" unf.) Sailboat Blocks. First, sew 3 pairs of H and I triangles for Sails. Next, draw a diagonal line on the backside of six H 2" squares, Place one H square over opposite ends of all J rectangles, right sides together and match edges. Stitch ON the drawn line, trim 1/4" from seam and press triangles outward for three boats. Next, sew rectangles around sails, sides first, then top and bottom according to the diagram.

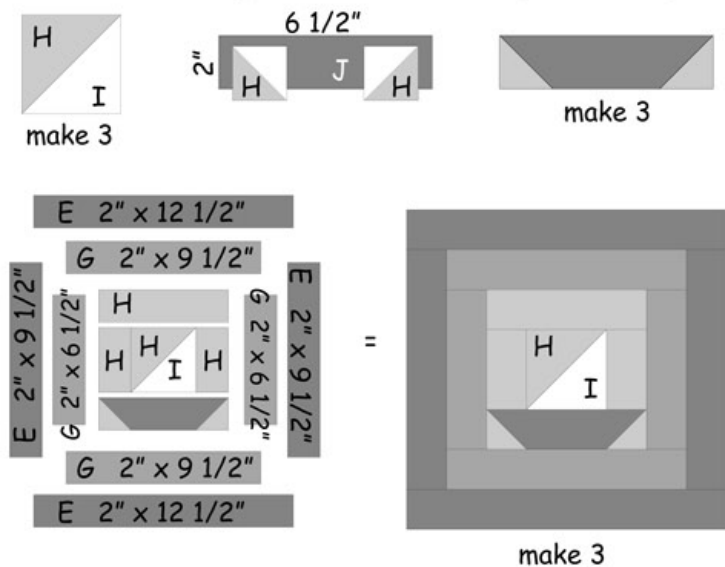

5. The quilt measures approximately 55" x 71". Make backing (C) at least 6" larger than the top. Baste together backing, batting and top. Quilt as desired. Attach binding (D) and enjoy!!